


Technical Specifications

Material:	Recycled high impact, co-polymer polypropylene
Specifications:	L 1000mm x W 500mm x H 42mm - 2 mastaHEX pavers = 1 square metre
Maximum Load Bearing Capacity:	1200 t/sqm (filled) 300 t/sqm (unfilled)
Weight:	2.3 kg
Temperature Range:	- 45°C to 100°C
Pallet Quantity:	170 units or 85m ² to a standard pallet (2.1m)
Colour:	Black (custom colours available on request)
Water Permeability:	99.7%
Sustainability:	100% Recyclable
Infill Requirements:	1m ³ per 20m ² of mastaHEX
Connection Method:	Clip lock system
Applications:	Equine yards, cattle yards, livestock feedlots, cattle troughs, stables, rural roads & driveways, walkways, car parks, turf and grass driveways, residential driveways, garden landscaping solutions, hardstand areas, public spaces, sloped land* and more.

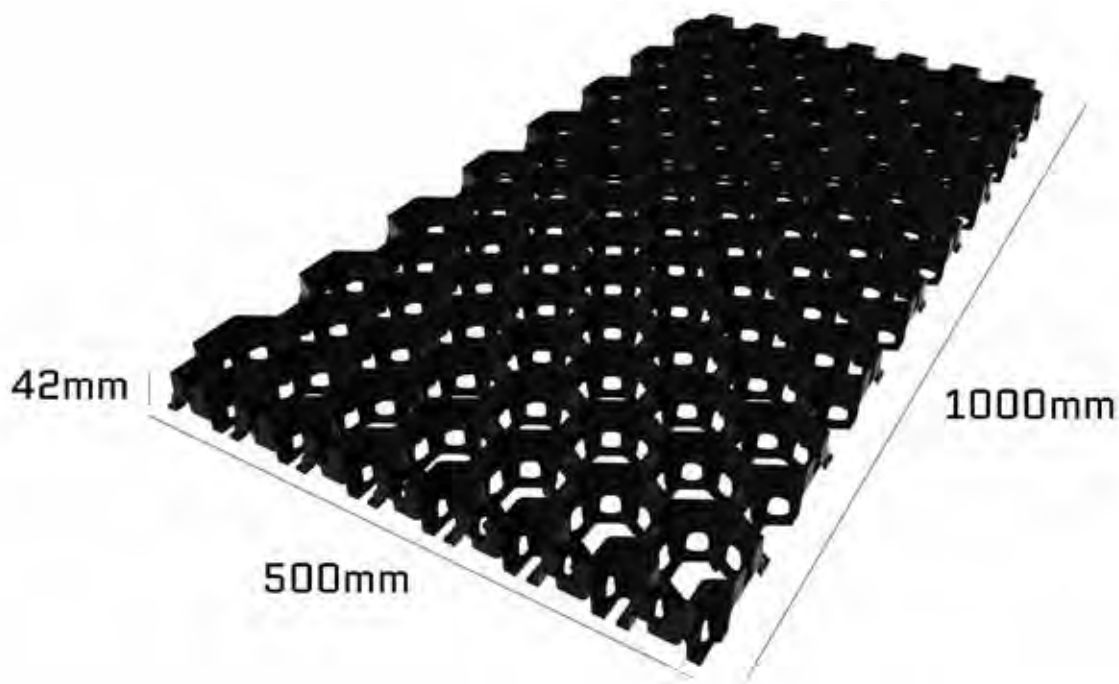

*For best results, we recommend installing on a maximum slope of 10mm.