

CCX Concrete Canvas

Concrete on the Roll



CCX™ GCCM/B

What Is It?

CCX™ is part of a revolutionary class of construction materials called Geosynthetic Cementitious Composite Mats and Barriers (GCCM/Bs). It is a flexible, concrete filled geosynthetic, that hardens on hydration to form a thin, durable, water proof concrete layer. Essentially, it's Concrete on a Roll™. CCX™ allows concrete installation without the need for plant or mixing equipment while also reducing vehicle movements and contractor burden. Simply unroll and just add water.

CCX™ consists of two interconnected layers of geotextile that encapsulate a specially formulated dry concrete mix. An LLDPE geomembrane backing ensures the material has very low permeability. CCX™ can be hydrated either by spraying or by being fully immersed in water. **CCX™ products exceed the minimum requirements of ASTM D8364 - Standard Specification for GCCM Materials.**

Benefits of CCX™ as a Bulk Water Infrastructure Liner

Rapid Installation

The speed of installation and high early strength gain means that infrastructure down-time is minimised. In critical infrastructure, where maintenance shut-down periods are fixed, this allows for much greater areas to be lined or repaired.

Reduced Seepage

Over time conventional concrete liners can suffer from widespread cracking due to differential ground movement, leading to significant seepage losses, undermining and, in the worst instances, complete channel collapse. CCX™ can accommodate a high level of differential ground movement due to the fibre reinforcement imbedded within the its structure. This prevents crack propagation whilst retaining low levels of permeability.

Composite Solution

CCX™ combines the low permeability of a geomembrane with the protection and durability of concrete. CCX™ can be installed as rapidly as conventional geosynthetics and 24 hours from hydration will cure to create a hard-wearing concrete liner which is ready to use.

Low Logistical Footprint

CCX™ has an un-hydrated unit weight of 14.5-15.5kg/m² compared to ~220kg/m² for 10cm of cured concrete. This means it is typically more than 10x more efficient in terms of the logistical footprint, requiring fewer trucks and reducing operational overheads.

Properties of CCX™

High Impermeability

CCX™ has an LLDPE geomembrane backing ensuring the material has very low permeability, significantly reducing or eliminating seepage losses.

Durable

CCX™ has a high degree of durability with abrasion resistance more than 3.5 times that of standard OPC concrete.


Long-Term Performance

CCX™ has very good long-term performance with a life expectancy in excess of 50 years.

Lower Carbon

CCX™ is a carbon efficient concrete solution that offers significant embodied carbon reduction compared to conventional concrete linings.

CCX™ Cross Section

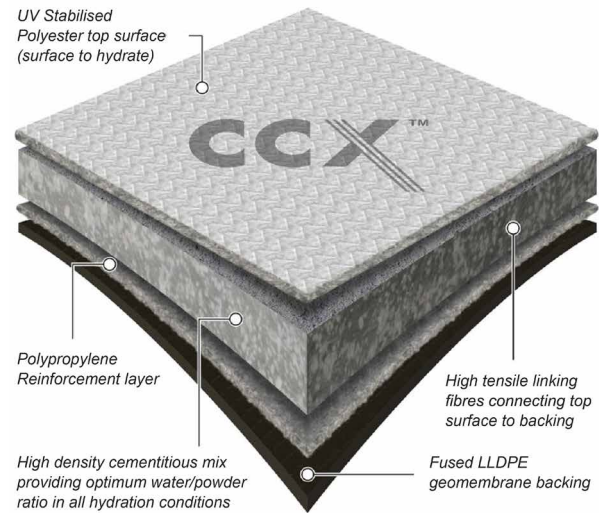

A CCX™ Irrigation Canal Installation



A CCX™ Bulk Water Infrastructure Remediation Installation

CCX™ GCCM/B Applications

Bulk Water Infrastructure Lining & Remediation

CCX™ can be rapidly unrolled to line earth canals as well as remediating existing concrete bulk water infrastructure. It is significantly faster, easier and more cost effective to install than conventional lining methods.

The LLDPE geomembrane backing to CCX™ ensures the material has very low permeability. The composite concrete top cover provides a high degree of long-term durability.

As a result, CCX™ is the ideal solution for the lining and remediation of channels and irrigation canals, increasing their operational life and reducing water seepage losses.



Deploying Bulk Roll of CCX™



Pegging CCX™ within anchor trenches



Thermal welding of CCX-B™ LLDPE backing



Thermally bonding overlapping layers of CCX™



Hydration of CCX™



Backfilling anchor trenches to prevent ingress

CCX™ Properties

2203.01.EN

Pre-set (Uncured)	Test Method	Unit	Typical Values
			CCX-M™
ASTM D8364 'Standard Specification for GCCM Materials' Classification			
GCCM/B Classification	ASTM D8364	Type	II
Dimensions			
Total Thickness	BS EN 1849-2	mm	10.3
Membrane Thickness		mm	0.3
Roll Sizes - W x L*		m	1.90 x 25
Area of CCX™ per Roll		m ²	47.5
Physical Properties			
Mass per Unit Area	BS EN 1849-2	kg/m ²	14.5 - 15.5
Density	BS EN 1849-2	kg/m ³	1500-1600
Density Increase on Curing		% Increase	20-25
Peel Strength - <i>strength of internal linking fibres (MD**)</i>	BS EN ISO 13426-2	kN/m	>4.0
Other Properties			

Post-set (Cured) - at 28 Days from Hydration Unless Specified (Hydrated by full immersion in accordance with ASTM D8030)	Test Method	Unit	Typical Values
			CCX-M™
Mechanical Performance			
Compressive Strength of Cementitious Mix <i>(water/cementitious materials ratio to ASTM D8329)</i>	ASTM D8329	MPa	>70
Flexural Strength - <i>at 24 Hours from Hydration (MD**)</i>			
- Initial Breaking Load	ASTM D8058	N/m	>2500
- Initial Flexural Strength	ASTM D8058	MPa	>4.0
- Final Flexural Strength	ASTM D8058	MPa	>10
Dynamic Puncture Resistance <i>(depth of perforation)</i>	BS EN ISO 13433	mm	0***
Pyramid Puncture Resistance	BS EN ISO 14574	kN	>15
Differential Ground Movement <i>(strain to exposure of geomembrane)</i>		%	<10
Environmental Durability			
Freeze - Thaw Resistance - <i>retained Initial Flexural Strength after 100 cycles (MD**)</i>	BS EN 12467	%	100
Weathering (UV) Resistance - <i>retained Initial Flexural Strength (MD**)</i>	BS EN 12224	%	90
Microbiological Resistance - <i>retained Initial Flexural Strength (MD**)</i>	BS EN 12225	%	87
Chemical Resistance - <i>retained Initial Flexural Strength (MD**)</i>			
- Method A - Acid - 10% solution H ₂ SO ₄	BS EN 14414	%	N/A
- Method B - Alkaline - saturated suspension Ca(OH) ₂	BS EN 14414	%	N/A
- Method C - Solvation & Swelling - 35% vol diesel, 35% vol paraffin, 30% vol lubricating oil HD30	BS EN 14414	%	N/A
- Method D - Synthetic Leachate	BS EN 14414	%	N/A
Root Resistance	DD CEN/TS 14416	-	Passed
Hydraulic Performance			
Abrasion Resistance - <i>cementitious barrier depth of wear</i>	ASTM C1353	mm/1000 Cycles	<0.2
Manning's Roughness Coefficient - <i>refer to CCX™ Manning's test report</i>	ASTM D6460	n	0.010-0.015
Impermeability - Geomembrane Barrier			
Water Permeability	BS EN 14150	m/s	N/A
Gas Permeability	ASTM D1434		N/A

*CCX™ Rolls are supplied by area so the listed length and width dimensions are typical values and tolerances are typically +5%/-2.5%. ** Machine direction. ***Probe did not make a full penetration through the product, therefore the depth of penetration is zero.

Information is provided based on current test data and may be subject to change as new information becomes available. The versatile nature of CCX™ means that all application conditions cannot be anticipated. Concrete Canvas Ltd makes no warranties and assumes no liability in connection with this information. Project specific testing may be required to determine the suitability for CCX™ material use in a particular application.

Fixing Component	Code	Description
Screws	CCCNPSS-4.0/35	CC Collated Screw 4.0x35mm SS 1000pk
Pin 12mm /50mm Head	CCP250/12	CC PIN 250 x 12mm HDG
Pin 16mm / 50mm Head	CCP380/16	CC PIN 380 x 16mm HDG
Pin 13mm / 20mm Head	TPIN360	M/TEX Concrete 360mm Fixing Pin 13mm
Sealant Cartridge	40-121970	T-Rex Power Fast Grab 290ml Steel Grey
Sealant Sausage	40-147559	T-Rex Power Fast Grab 600ml Steel Grey

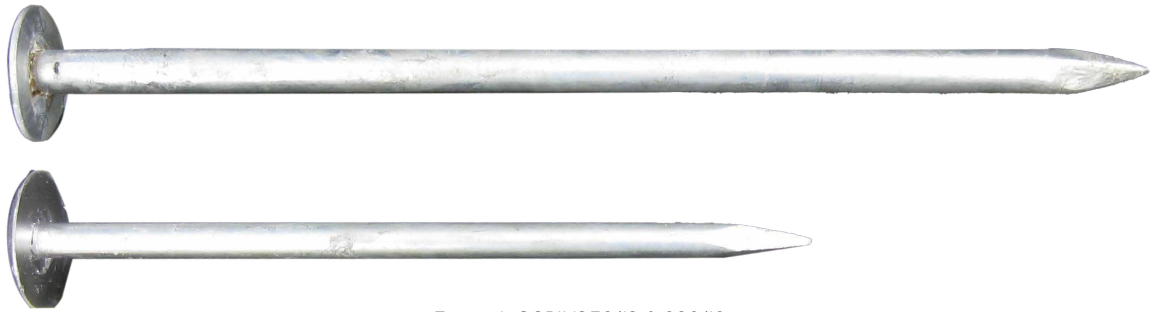


Figure 1- CCPIN250/12 & 380/16



Figure 2 - TPIN360



Jaybro

CONSIDER IT DONE.

Polyfabrics

*Reliability you
can build on*

5%

PRICE BEAT GUARANTEE

If you find a lower price for an equivalent to any product in our catalogue, We'll beat that price by 5%*.

*See terms and conditions on website

technical@polyfabrics.com.au

sales@polyfabrics.com.au

polyfabrics.com.au

1300 287 484

NSW WAREHOUSE
60 O'Connell St.
Smithfield NSW 2164

VIC WAREHOUSE
84-86 Mitchell St.
Maidstone VIC 3012

QLD WAREHOUSE
13/63 Burnside Rd.
Stapylton QLD 4207

SA WAREHOUSE
Ceafield Road, Para
Hills West, SA, 5096

**NZ WAREHOUSE -
NORTH ISLAND**
8-10 Hannigan Drive,
St Johns Auckland 1072

**NZ WAREHOUSE -
SOUTH ISLAND**
2 Kennaway Road,
Woolston Christchurch 8023

DISCLAIMER: Consult Jaybro Group or a certified Engineer for site specific installation instructions. Jaybro Group reserves the right to change its product specification at any time. It is the responsibility of the specifier and purchaser to ensure that product specifications used for design and procurement purposes are current and consistent with the products used in each instance. E&OE